




DISPERSION SPRAY HEAD WITH TWELVE (12) EQUALLY SPACED HOLES

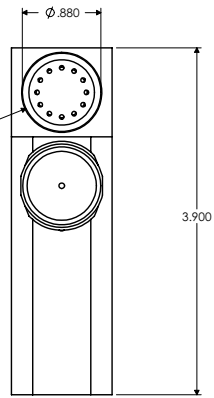

FRONT VIEW

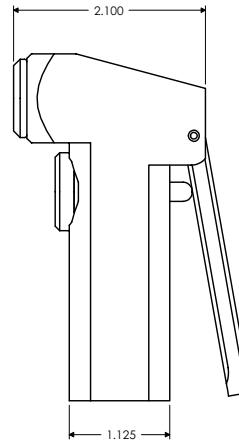

SIDE VIEW

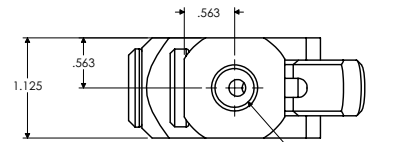

BOTTOM VIEW

INLET (1/4" FNPT)

PART	MATERIAL
BODY	VIRGIN PTFE
ACTUATOR	POLYPROPYLENE
ACTUATOR CAP	POLYPROPYLENE
NOZZLE	PTFE
HANDLE	POLYPROPYLENE
HANDLE DOWEL PIN	18-8 STAINLESS STEEL
SPRING	302 SS, TEFLON COATED
O-RINGS	VITON

SPECIFICATIONS	
FLOW RATE - GPM @ 40PSI	1.5
MAX PRESSURE - PSIG (kPa)	75 (517)
MAX TEMPERATURE - MEDIA°F (°C)	160 (71)

O-RINGS	QTY
AS568A-009	1
AS568A-012	1
AS568A-114	1

TOLERANCES UNLESS OTHERWISE SPECIFIED	<b>DYTEC</b> 102 COMPASS PT. DR. STE. D. ST. CHARLES, MO. 63301-4414 (636) 949-5600		THG-DN4P-TFE-V TEFLON DI SPRAY GUN					
			PHYSICAL DIMENSIONS					
APPROVAL		DATE	DWN BY	MPJ	DATE	SCALE	1=1	CRWD BY
ENG	GA	DATE	GA	DATE	1 OF 1	44	0002447	30 00
<small>ALL DIMENSIONS ARE IN INCHES</small> <small>PAIN:EN:CC:DYTEC\THG-DN4P-TFE-V-PHYSICAL.DWG</small>								