




DISPERSION SPRAY HEAD WITH TWELVE (12) EQUALLY SPACED HOLES

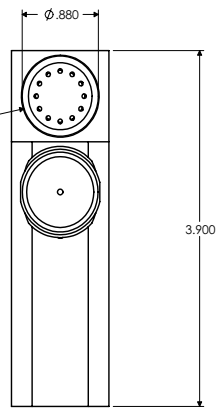

FRONT VIEW

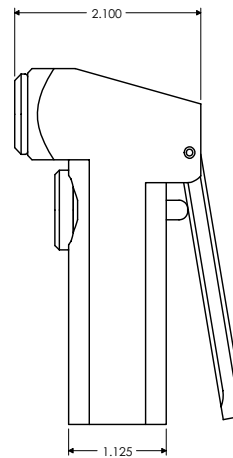

SIDE VIEW

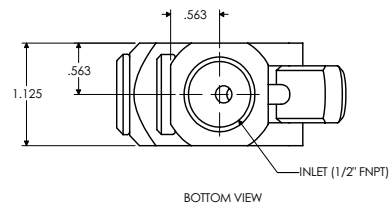

BOTTOM VIEW

PART	MATERIAL
BODY	VIRGIN PTFE
ACTUATOR	POLYPROPYLENE
ACTUATOR CAP	POLYPROPYLENE
NOZZLE	PTFE
HANDLE	POLYPROPYLENE
HANDLE DOWEL PIN	18-8 STAINLESS STEEL
SPRING	302 SS, TEFLON COATED
O-RINGS	VITON

SPECIFICATIONS	
FLOW RATE - GPM @ 40PSI	1.5
MAX PRESSURE - PSIG (kPa)	75 (517)
MAX TEMPERATURE - MEDIA ^o F (°C)	160 (71)

O-RINGS	QTY
AS568A-009	1
AS568A-012	1
AS568A-114	1

TOLERANCES UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE IN INCHES	
PATH: H:\CC\DYTEC\THG-DNBP-TFE-V-PHYSICALS.DWG	

DYTEC 102 COMPASS PT. DR. STE. D.
ST. CHARLES, MO. 63301-4414
(636) 949-5600

THG-DNBP-TFE-V TEFLON DI SPRAY GUN
PHYSICAL DIMENSIONS

APPROVAL		DRN	MPJ	DATE	03/29/03	SCALE	1=1	CHKD
ENG	DATE	BY						BY
GA	DATE	1 OF 1	44	0002433	30	00		